JARRISM ELECTRONICS
www.jarrismpower.com

Address: No.1 Xiaolang Road, Mazhu Town, Yuyao City,
Ningbo City, Zhejiang Province

Contact:
Kenneth Wei; Email: kenneth@jarrism.com;
Mobile:(+86)15121077407

JARRISM ELECTRONICS

SECURITY PRODUCT

JARRISM INTELLIGENT TECHNOLOGY CO., LTD.

Brief Introduction

Jarrism Intelligent Technology Co., Ltd. is a branch of Yuyao Yaoda Electronic Technology Co., Ltd., located in Mazhu Town, Yuyao City, Ningbo City, Zhejiang Province. Mainly engaged in portable micro-grid all kinds of energy storage, security products and battery PACK assembly. The company has passed ISO9001, ISO14001 and other management system certifications, and the products have UL, CE, ROHS, UN38.3 and other international standard certifications. At the same time, we also pay attention to continuous breakthroughs in product technology, strictly require product quality, develop in accordance with military industry and world standards, and develop and manufacture to solve customer needs. The company invests in advanced R&D, testing and production equipment according to standardized modern plant facilities. There are more than 300 employees, including more than 30 quality engineers and R&D personnel; providing customers with advanced, excellent and first-class products and common development are guaranteed to be honest and reliable.

Item Explanation

P1-P2 Backup Alarm
P3-P4 Piezo Siren
P5-P8 Electronic Siren
P9-P10 Battery Backup Alarm
P11-P12 Drver Unit
P13-P14 Central Door Lock System
P15-P17 Magnetic Switch
P18 Pir Sensor For Light
P19-P20 Sirobe Lighi

Jarrism

Certificate

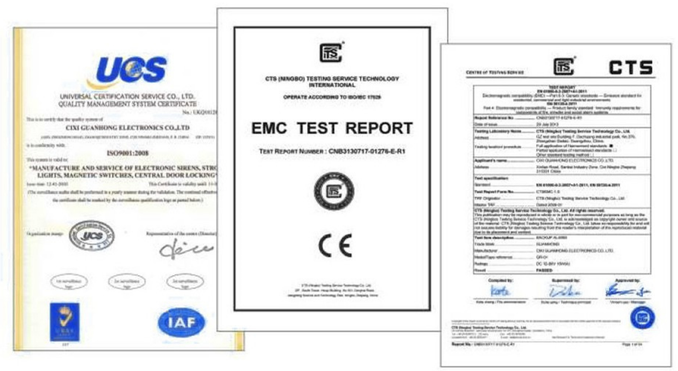

Quality for existence, Prestige for marketing

★DC12-80V ★Sturdy and durable ★Anti-seismic ★Loud ★Waterproof
★Self-preservation function ★Easy installation

BACKUP ALARM

The product is specialized in doing excavator, construction machinery and other special vehicle, container vehicle, large vehicle. These products all kinds of performance is stable and reliable, which compare favorably with part of import products.

JHS-01R



Technical parameters

Power	15W
Voltage	DC 12-80V
Current	250mA
Sound	Beep-beep sound/ White noise
dB/M	102dB±3dB
Material	Nylon
Color	Black
Outer packing	60PCS/44*25*26cm
N.W/G.W	15kgs/16kgs
Waterproof grade	IP67

JHS-02R



Technical parameters

Power	15W
Voltage	DC 12-80V
Current	250mA
Sound	Beep-beep sound/ White noise
dB/M	102dB±3dB
Material	Nylon
Color	Black
Outer packing	60PCS/44*25*26cm
N.W/G.W	15kgs/16kgs
Waterproof grade	IP67

JHS-03R



Technical parameters

Power	15W
Voltage	DC 12-80V
Current	250mA
Sound	Beep-beep sound/ White noise
dB/M	112dB±3dB
Material	Nylon
Color	Black
Outer packing	48PCS/43.5*24.5*30.5cm
N.W/G.W	18kgs/19kgs
Waterproof grade	IP67

BACKUP ALARM

Jarrism

JHS-04R



Technical parameters

Power	15W
Voltage	DC 12-80V
Current	250mA
Sound	Beep-beep sound/ White noise
dB/M	112dB±3dB
Material	Nylon
Color	Black
Outer packing	24PCS/45*27*29cm
N.W/G.W	17.5kgs/18.5kgs
Waterproof grade	IP67

JHS-05R



Technical parameters

Power	15W
Voltage	DC 12-80V
Current	250mA
Sound	Beep-beep sound/ White noise
dB/M	102dB
Material	Nylon
Color	Black
Outer packing	80PCS/42*23*29cm
N.W/G.W	15kgs/16kgs
Waterproof grade	IP67

JHS-06R



Technical parameters

Power	10W
Voltage	DC 12-24V
Current	120mA
Sound	Beep-beep sound
dB/M	108dB
Material	ABS
Color	Black
Outer packing	200PCS/47*38.5*31cm
N.W/G.W	13.5kgs/14.5kgs
Waterproof grade	IP67

JHS-07R



Technical parameters

Power	10W
Voltage	DC 12-24V
Current	120mA
Sound	Beep-beep sound
dB/M	108dB
Material	PP
Color	Black
Outer packing	100PCS/42*36*40cm
N.W/G.W	7.5kgs/8.5kgs
Waterproof grade	IP65

JHS-09R



Technical parameters

Power	15W
Voltage	DC 12-80V
Current	250mA
Sound	Beep-beep sound/ White noise
dB/M	102dB±3dB
Material	Nylon
Color	Black
Outer packing	60PCS/44*25*26cm
N.W/G.W	15kgs/16kgs
Waterproof grade	IP67

JHS-10R



Technical parameters

Power	20W
Voltage	DC 12-80V
Current	500mA
Sound	Beep-beep sound/ White noise
dB/M	112dB±3dB
Material	Steel
Color	Black
Outer packing	24PCS/32*27*28cm
N.W/G.W	18kgs/19kgs
Waterproof grade	IP67

PIEZO SIREN

JHS-01P



Technical parameters

Power	10W
Freq.	4.3K
Voltage	DC 6-15V/24V
Current	120mA
Sound	1 or 6 Tone, Melodic
dB/M	105dB
Material	ABS
Color	Black/White
Packing	200PCS/0.032CBM

JHS-02P





Technical parameters

Power	10W
Freq.	2.6K
Voltage	DC 6-15V/24V
Current	150mA
Sound	1 or Car back, Melodic
dB/M	110/115dB
Material	ABS
Color	Black/White
Packing	200PCS/0.084CBM

JHS-03P



Technical parameters

Power	10/15W
Freq.	2.6K
Voltage	DC 6-15V/24V
Current	150mA
Sound	1 or 6 Tone, Melodic
dB/M	105/110dB
Material	ABS
Color	Black/White
Packing	100PCS/0.039CBM

JHS-04P



Technical parameters

Power	10W
Freq.	4.3K
Voltage	DC 6-15V/24V
Current	120mA
Sound	1 or 6 Tone, Melodic
dB/M	105dB
Material	ABS
Color	Black
Packing	200PCS/0.033CBM

JHS-05P



Technical parameters

Power	10W
Freq.	2.6K
Voltage	DC 6-15V/24V
Current	150mA
Sound	1 or 6 Tone, Melodic
dB/M	108dB
Material	ABS
Color	White
Packing	100PCS/0.055CBM

JHS-06P



Technical parameters

Power	10W
Freq.	2.6K
Voltage	DC 6-15V/24V
Current	120mA
Sound	1 or 6 Tone, Melodic
dB/M	105dB
Material	ABS
Color	Black/Red/White
Packing	200PCS/0.049CBM

PIEZO SIREN

JHS-07P



Technical parameters

Power	10/15W
Freq.	2.6K
Voltage	DC 6-15V/24V
Current	150mA
Sound	1 or 6 Tone, Melodic
dB/M	110dB
Material	ABS
Color	Black/Red
Packing	100PCS/0.062CBM

JHS-09P



Technical parameters

Power	10W
Freq.	4.3K
Voltage	DC 6-15V/24V
Current	150mA
Sound	1 or 6 Tone, Melodic
dB/M	105dB
Material	ABS
Color	Black/White
Packing	200PCS/0.02CBM

JHS-12P



Technical parameters

Power	10W
Freq.	4.3K
Voltage	DC 6-15V/24V
Current	180mA
Sound	1 or 6 Tone, Melodic
dB/M	105dB
Material	ABS
Color	Black
Packing	100PCS/0.028CBM

JHS-15P



Technical parameters

Power	10W
Freq.	2.6K
Voltage	DC 6-15V/24V
Current	120mA
Sound	1 or 6 Tone, Melodic
dB/M	105dB
Material	ABS
Color	Black
Packing	-

JHS-16P



Technical parameters

Power	5W
Freq.	2.6K
Voltage	DC 6-24V
Current	120mA
Sound	1 or Bebe
dB/M	105dB
Material	ABS
Color	Black/White
Packing	500PCS/0.02CBM

JHS-17P



Technical parameters

Power	5W
Freq.	2.6K
Voltage	DC 6-24V
Current	150mA
Sound	1 or Bebe
dB/M	95/100dB
Material	ABS
Color	Black/White
Packing	500PCS/0.03CBM

ELECTRONIC SIREN

JARRISM INTELLIGENT
TECHNOLOGY CO., LTD.

JHS-18S



Technical parameters

Power	20W
Imped.	6 ohm
Voltage	DC 6-15V
Current	1200mA
Sound	1 or 2 Tone
dB/M	119dB
Material	ABS
Color	Black
Packing	-

JHS-20S



Technical parameters

Power	15/20/25W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115/120dB
Material	ABS
Color	Black
Packing	60PCS/0.048CBM

JHS-23S



Technical parameters

Power	15/20W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	113/118dB
Material	ABS
Color	Black
Packing	60PCS/0.048CBM

ELECTRONIC SIREN

Jarrism

JHS-25S



Technical parameters

Power	15/20W
Imped.	6/10 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	113/118dB
Material	ABS
Color	Black
Packing	60PCS/0.048CBM

JHS-27S



Technical parameters

Power	15/20W
Imped.	6/10 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	113/118dB
Material	ABS
Color	Black
Packing	60PCS/0.048CBM

JHS-35S



Technical parameters

Power	15/20/25W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115/120dB
Material	PP
Color	Black
Packing	50PCS/0.06CBM

JHS-36S



Technical parameters

Power	15W
Imped.	6 ohm
Voltage	DC 6-15V
Current	600mA
Sound	1 or 2 Tone
dB/M	115dB
Material	ABS
Color	White
Packing	40PCS/0.039CBM

JHS-38S



Technical parameters

Power	15/20W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115/120dB
Material	ABS
Color	Black/Red
Packing	50PCS/0.042CBM

JHS-39S



Technical parameters

Power	15/20W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115dB
Material	ABS
Color	Black
Packing	50PCS/0.04CBM

ELECTRONIC SIREN

JHS-44S



Technical parameters

Power	15/20/25W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115/120dB
Material	PP
Color	Black
Packing	40PCS/0.058CBM

JHS-48S



Technical parameters

Power	15/20/25W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115/120dB
Material	ABS
Color	Black
Packing	40PCS/0.06CBM

JHS-50S



Technical parameters

Power	25W
Imped.	6 ohm
Freq	400-7.5KHz
dB/M	120dB
Material	PP
Color	Green

JHS-53H



Technical parameters

Power	12/20/25W
Imped.	4/6/8 ohm
Freq	400-7.5KHz
Material	PP
Color	Red/Black
Packing	24PCS/0.07CBM

JHS-55S



Technical parameters

Power	20/25/30W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	115/120/125dB
Material	ABS
Color	Black/White
Packing	24PCS/0.08CBM

JHS-55SF



Technical parameters

Power	25/30W
Voltage	DC 6-15V
Current	1200/1500mA
Sound	4 Tone with buttons Fire/Polic/Ambulance/Engineering truck
dB/M	125dB
Material	ABS
Color	Black/White
Packing	24PCS/0.08CBM

ELECTRONIC SIREN

JHS-55ST



Technical parameters

Power	30W
Voltage	DC 6-15V
Current	1200mA
Sound	3 Tone with buttons Fire engine/Police siren/Ambulance
dB/M	125dB
Material	ABS
Color	Black/White
Packing	24PCS/0.08CBM

JHS-57S



Technical parameters

Power	20/25/30W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	115/120/125dB
Material	ABS
Color	Black/White
Packing	24PCS/0.1CBM

JHS-62S



Technical parameters

Power	20W
Imped.	6 ohm
Voltage	DC 6-15V
Current	1200mA
Sound	1 or 6 Tone, Melodic
dB/M	118dB
Material	PP
Color	Black
Packing	-

JHS-68S



Technical parameters

Power	20W
Imped.	6 ohm
Voltage	DC 6-15V
Current	1200mA
Sound	1 or 2 Tone
dB/M	119dB
Material	ABS
Color	Black
Packing	-

JHS-85S



Technical parameters

Power	20/25/30W
Imped.	4/6/8 ohm
Voltage	DC 6-15V/AC 100-220V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	115/120/125dB
Material	ABS
Color	White
Packing	12PCS/0.1CBM

JHS-711S



Technical parameters

Power	40W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	1200mA
Sound	1 or 6 Tone, Melodic
dB/M	125dB
Material	ABS
Color	White
Packing	12PCS/0.15CBM

BATTERY BACKUP ALARM

JHS-19B



Technical parameters

Power	20W
Imped.	6 ohm
Voltage	DC 6-15V
Current	1200mA
Sound	1 or 6 Tone, Melodic
dB/M	119dB
Material	ABS
Color	Black
N.W/G.W	16.5kgs/17.5kgs
Packing	60PCS/0.042CBM

JHS-21B



Technical parameters

Power	15/20W
Imped.	6/10 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	115/120dB
Material	ABS
Color	Black
Packing	100PCS/0.055CBM

JHS-22B



Technical parameters

Power	15/20W
Imped.	6/10 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	115/120dB
Material	ABS
Color	Black
Packing	100PCS/0.055CBM

JHS-24B



Technical parameters

Power	15/20W
Imped.	6/10 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	115/120dB
Material	ABS
Color	Black
Packing	100PCS/0.055CBM

JHS-26B



Technical parameters

Power	15/20W
Imped.	6/10 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	115/120dB
Material	ABS
Color	Black
Packing	100PCS/0.055CBM

JHS-28B



Technical parameters

Power	15/20W
Imped.	6/10 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	115/120dB
Material	ABS
Color	Black
Packing	100PCS/0.055CBM

BATTERY BACKUP ALARM

JHS-29B



Technical parameters

Power	15/20W
Imped.	6/10 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	115/120dB
Material	ABS
Color	Black
Packing	100PCS/0.06CBM

JHS-30B



Technical parameters

Power	15/20/25W
Imped.	6/10 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	115/120dB
Material	ABS
Color	Black
Packing	40PCS/0.05CBM

JHS-31B



Technical parameters

Power	15/20/25W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115/120dB
Material	ABS
Color	Black
Packing	40PCS/0.048CBM

JHS-32B



Technical parameters

Power	15/20/25W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115/120dB
Material	ABS
Color	Black
Packing	40PCS/0.048CBM

JHS-33B



Technical parameters

Power	15/20/25W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115/120dB
Material	ABS
Color	Black
Packing	40PCS/0.048CBM

JHS-34B



Technical parameters

Power	15/20/25W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115/120dB
Material	ABS
Color	Black
Packing	40PCS/0.048CBM

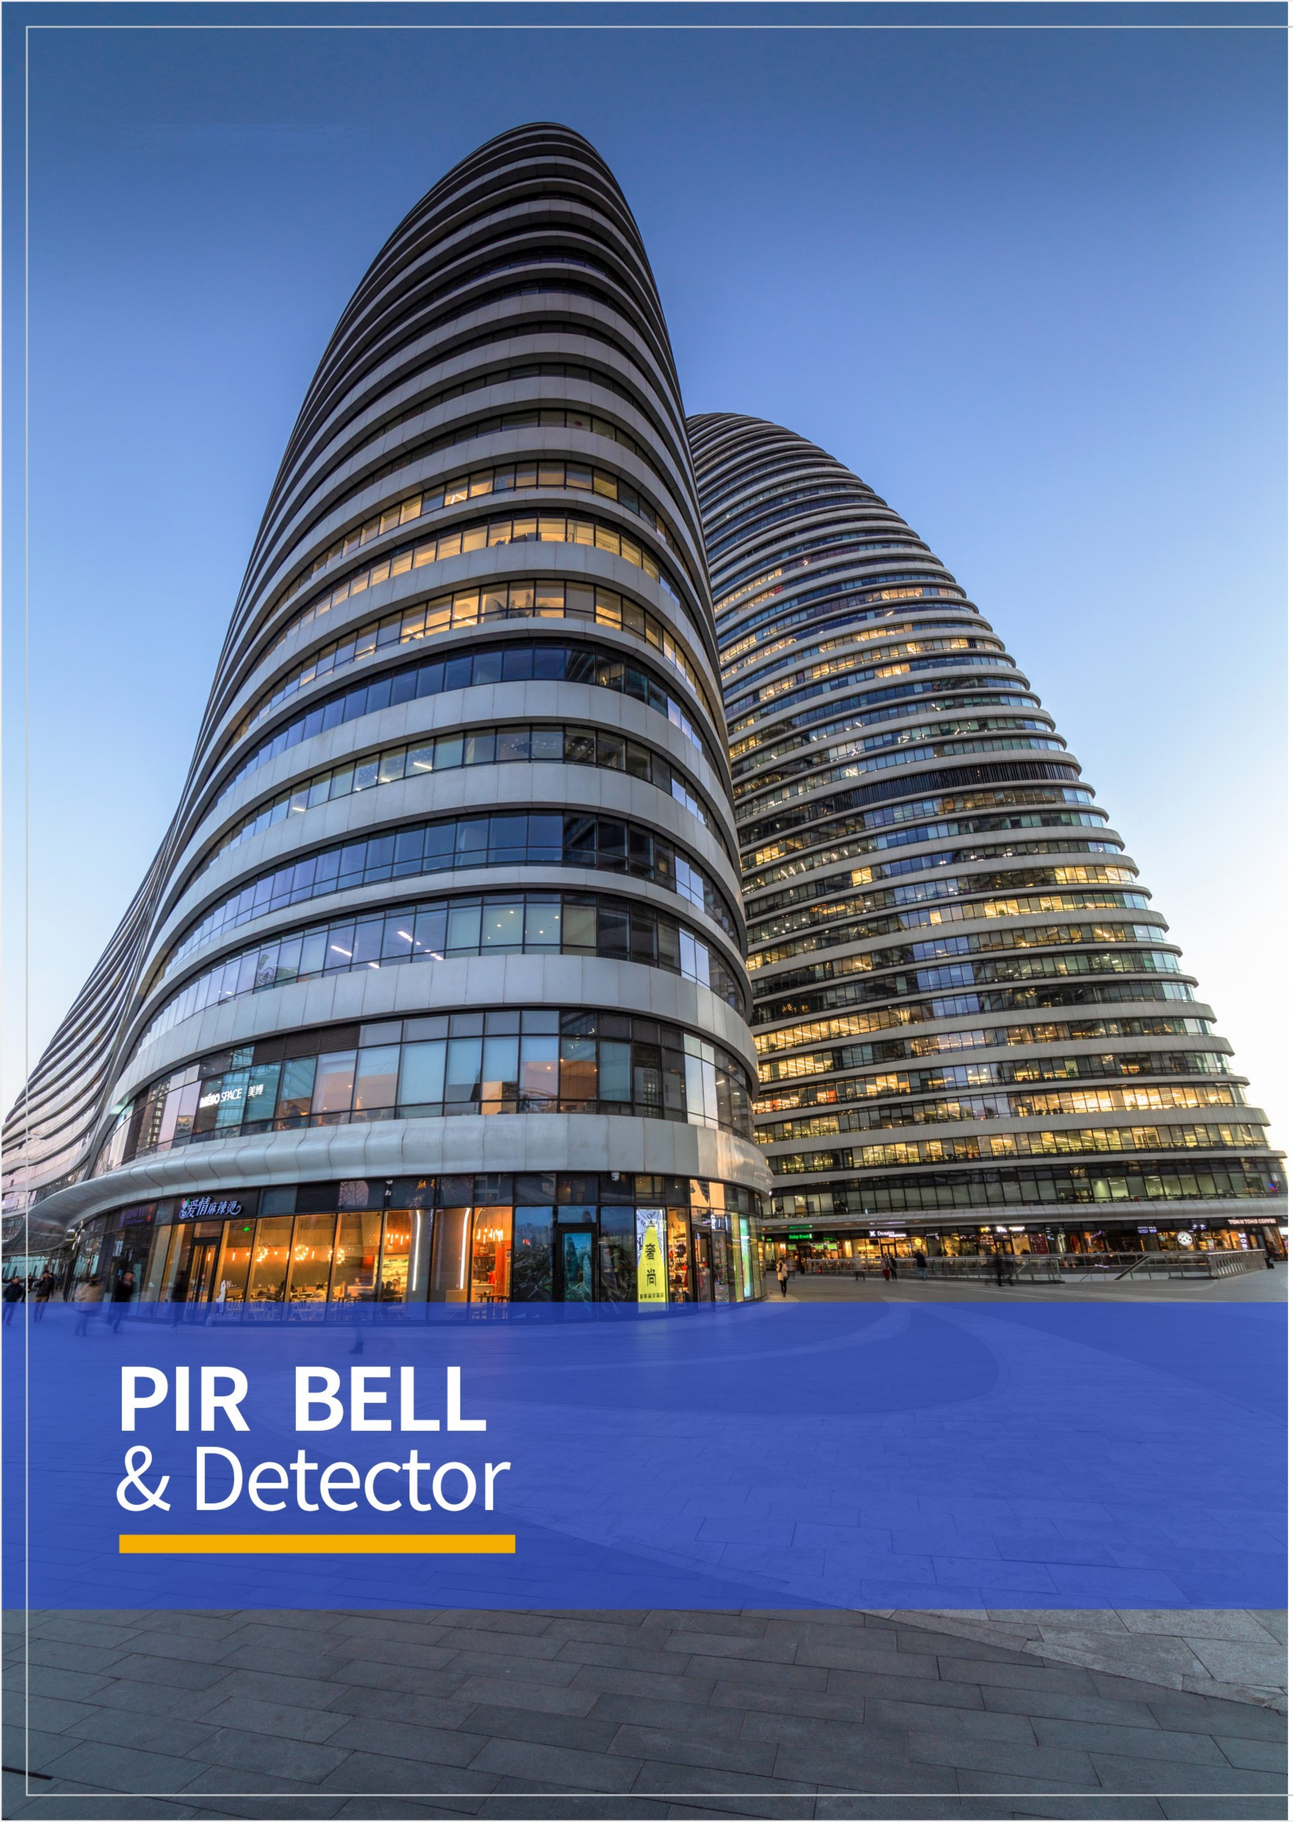

PIR BELL & Detector

PIR BELL & Detector

JHS-A92

Technical parameters

Voltage	12/24/110-220V
Operating voltage limites	16-33VDC
Operating current	≤40mA
Sound pressure	93dB/meter
Size	150mm
Weight	700g
Stuff	iron
back box	The back box needs to be purchased separately

JHS-913

Technical parameters

- Glass activator
- one-time type
- com/nc/no switch only
- Initial contact 125V 4A

JHS-3701

Technical parameters

Heat Detector
- 2wire / 4 wire Rate of Rise/Fixed Temperature Heat detectors
- 2wire-10~35VDC
- 4 wire -12V or 24V DCoperation

JHS-3182

Technical parameters

Smoke Detector
- 2 wire
- DC 12-35V
- Dual LEDs for 360° visibility
- Temperature range :-10°C to 50°C
- 100m² rating for smoke; 50m² rating for heat sensor

DRIVER UNIT

JIANGSU JARRISM INTELLIGENT TECHNOLOGY CO., LTD.

ELECTRONIC SIREN

Jarrism

JHS-76D

Technical parameters

Power	25W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	24# 10cm
dB/M	120dB
Material	ABS
Color	Black
N.W/G.W	19kgs/20kgs
Packing	48PCS/0.013CBM

JHS-77D

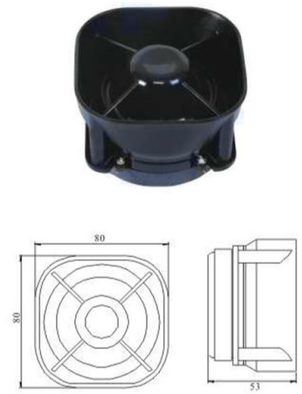

Technical parameters

Power	25W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	24# 10cm
dB/M	120dB
Material	ABS
Color	Black
Packing	48PCS/0.035CBM

JHS-78D

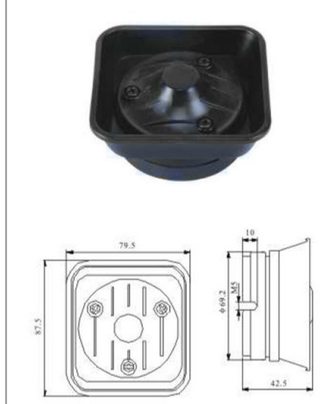

Technical parameters

Power	25W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	24# 10cm
dB/M	120dB
Material	ABS
Color	Black
Packing	48PCS/0.022CBM

JHS-33D

Technical parameters

Power	15/20W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	24# 10cm
dB/M	120dB
Material	ABS
Color	Black
Packing	100PCS/0.015CBM

JHS-35D

Technical parameters

Power	15/20W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	24# 10cm
dB/M	120dB
Material	ABS
Color	Black
Packing	60PCS/0.024CBM

JHS-55D

Technical parameters

Power	15/20W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	24# 10cm
dB/M	120dB
Material	ABS
Color	Black
Packing	60PCS/0.03CBM

JHS-79D

Technical parameters

Power	25W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	18# 20cm
dB/M	120dB
Material	ABS
Color	Black
N.W/G.W	15kgs/16kgs
Packing	36PCS/0.03CBM

JHS-80D

Technical parameters

Power	40W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	18# 20cm
dB/M	120dB
Material	ABS
Color	Black
N.W/G.W	14.5kgs/15.5kgs
Packing	16PCS/0.018CBM

JHS-81D

Technical parameters

Power	40W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	18# 20cm
dB/M	120dB
Material	ABS
Color	Black
N.W/G.W	14.5kgs/15.5kgs
Packing	16PCS/0.018CBM

CENTRAL DOOR LOCK SYSTEM

JHS-02K

JHS-05K

JHS-02KC

JHS-05KC

JHS-02KD

JHS-05KD

Hardware Accessories

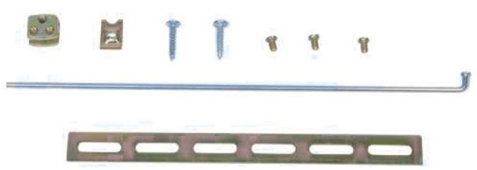

Technical parameters

Operating voltage	12V or 24V DC
Operating temperature	-40°C~+80°C
Empty load power consumption	0.14mA
Stroke power consumption	6A
Traveling distance	17mm
Pulling power	>30N or >40N
Life cycle	100,000

- Ultrasonic welding 100% waterproof
- Packing 100PCS/0.035CBM
- Anti-block design
- With 360 degree rotatable head(Option)

CENTRAL DOOR LOCK SYSTEM

JHS-401K

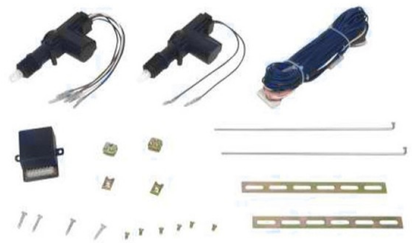

1pc 5 wires, 1pc 2 wires

- Anti-block design
- Ultrasonic welding 100% waterproof
- High torque motor
- Strong output
- With long service life
- Be suitable for various autos
- Compatible with car alarm system
- With 360° rotatable head
- Packing 20set/49*30*48cm

JHS-402K

1pc 5 wires, 1pc 2 wires With remote controller

- Anti-block design
- Ultrasonic welding 100% waterproof
- High torque motor
- Strong output
- With long service life
- Be suitable for various autos
- Compatible with car alarm system
- With 360° rotatable head
- Packing 20set/49*30*48cm

JHS-403K

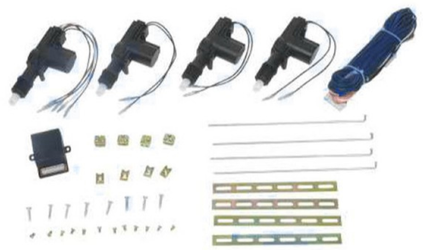

1pc 5 wires, 3pcs 2 wires

- Anti-block design
- Ultrasonic welding 100% waterproof
- High torque motor
- Strong output
- With long service life
- Be suitable for various autos
- Compatible with car alarm system
- With 360° rotatable head
- Packing 20set/49*30*48cm

JHS-404K

1pc 5 wires, 3pcs 2 wires With remote controller

- Anti-block design
- Ultrasonic welding 100% waterproof
- High torque motor
- Strong output
- With long service life
- Be suitable for various autos
- Compatible with car alarm system
- With 360° rotatable head
- Packing 20set/49*30*48cm

JHS-405K

2pcs 5 wires, 2pcs 2 wires

- Anti-block design
- Ultrasonic welding 100% waterproof
- High torque motor
- Strong output
- With long service life
- Be suitable for various autos
- Compatible with car alarm system
- With 360° rotatable head
- Packing 20set/49*30*48cm

JHS-406K

2pcs 5 wires, 2pcs 2 wires With remote controller

- Anti-block design
- Ultrasonic welding 100% waterproof
- High torque motor
- Strong output
- With long service life
- Be suitable for various autos
- Compatible with car alarm system
- With 360° rotatable head
- Packing 20set/49*30*48cm

MAGNETIC SWITCH

JHS-01M

Drawing



Technical parameters

CON.Mode	COM.,N/O, N/C
Active gap	≥15mm, ≤25mm
Voltage	DC200V
Current	300mA
Power	10W
Material	ABS
Color	White
Q'TY	400PCS
Meas	30*25*32cm

JHS-02M

Drawing



Technical parameters

CON.Mode	COM.,N/O, N/C
Active gap	≥15mm, ≤25mm
Voltage	DC200V
Current	100mA
Power	10W
Material	ABS
Color	White
Q'TY	800PCS
Meas	30*25*32cm

JHS-03M

Drawing



Technical parameters

CON.Mode	COM.,N/O, N/C
Active gap	≥15mm, ≤25mm
Voltage	DC200V
Current	100mA
Power	10W
Material	ABS
Color	White
Q'TY	800PCS
Meas	30*25*32cm

JHS-04M

Drawing



Technical parameters

CON.Mode	COM.,N/O, N/C
Active gap	≥35mm, ≤80mm
Voltage	DC100V
Current	500mA
Power	10W
Material	Metal
Color	Grey
Q'TY	36PCS
Meas	30*25*32cm

JHS-05M

Drawing



Technical parameters

CON.Mode	COM.,N/O, N/C
Active gap	≥15mm, ≤55mm
Voltage	DC100V
Current	500mA
Power	10W
Material	ABS
Color	White
Q'TY	800PCS
Meas	30*25*32cm

MAGNETIC SWITCH

JHS-07M

Drawing



Technical parameters

CON.Mode	COM.,N/O
Active gap	≥14mm, ≤25mm
Voltage	DC100V
Current	500mA
Power	10W
Material	ABS
Color	White
Q'TY	1000PCS
Meas	30*25*32cm

JHS-08M

Drawing



Technical parameters

CON.Mode	COM.,N/O
Active gap	≥15mm, ≤25mm
Voltage	DC100V
Current	500mA
Power	10W
Material	ABS
Color	White
Q'TY	1000PCS
Meas	33*21*26cm

JHS-11M

Drawing



Technical parameters

CON.Mode	COM.,N/O, N/C
Active gap	≥15mm, ≤25mm
Voltage	DC100V
Current	500mA
Power	10W
Material	ABS
Color	White
Q'TY	500PCS
Meas	33*22*32cm

JHS-16M

Drawing



Technical parameters

CON.Mode	COM.,N/O, N/C
Active gap	≥17mm, ≤25mm
Voltage	DC100V
Current	500mA
Power	10W
Material	ABS
Color	White
Q'TY	400PCS
Meas	30*25*32cm

JHS-17M

Drawing



Technical parameters

CON.Mode	COM.,N/O, N/C
Active gap	≥40mm, ≤80mm
Voltage	DC100V
Current	500mA
Power	10W
Material	Metal
Color	Grey
Q'TY	50PCS
Meas	30*25*32cm

MAGNETIC SWITCH

JHS-18M

Drawing



Technical parameters

CON.Mode	COM.,N/O, N/C
Active gap	≥50mm, ≤90mm
Voltage	DC100V
Current	500mA
Power	10W
Material	Metal
Color	Grey
Q'TY	40PCS
Meas	30*25*32cm

JHS-19M

Drawing



Technical parameters

CON.Mode	COM.,N/O, N/C
Active gap	≥42mm, ≤58mm
Voltage	DC100V
Current	500mA
Power	10W
Material	Metal
Color	Grey
Q'TY	200PCS
Meas	30*25*32cm

JHS-20M

Drawing



Technical parameters

CON.Mode	COM.,N/O, N/C
Active gap	≥45mm, ≤80mm
Voltage	DC100V
Current	500mA
Power	10W
Material	ABS and Metal
Color	Grey
Q'TY	40PCS
Meas	30*25*32cm

JHS-21M

Drawing

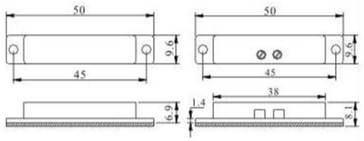

Technical parameters

CON.Mode	COM.,N/O, N/C
Active gap	≥15mm, ≤30mm
Voltage	DC100V
Current	500mA
Power	10W
Material	ABS
Color	White
Q'TY	1000PCS
Meas	30*25*32cm

JHS-22M

Drawing



Technical parameters

CON.Mode	COM.,N/O, N/C
Active gap	≥15mm, ≤25mm
Voltage	DC200V
Current	100mA
Power	10W
Material	ABS
Color	White
Q'TY	1000PCS
Meas	30*25*32cm

PIR SENSOR FOR LIGHT

Technical parameters

Detection angle	180°
Detection range	2-12m
Working voltage	DC24-51V/AC220V
Power rating	300W
Delay time	85-12min
Illumination	2-2000LUX
Operating temperature	-20°C~+409s°C
Operating humidity	Less than 93% RH
Installation height	1.8m-2.5m
Color	Black/Grey/white

STROBE LIGHT

JHS-01L

Drawing



Technical parameters

Voltage	DC 12V
Current	120mA
Flashes	90/minute
Install	Two screws
Color	Red/Blue/Yellow
Q'TY	120PCS
Meas	45*29*37cm

JHS-02L

Drawing



Technical parameters

Voltage	DC 12V
Current	120mA
Flashes	90/minute
Install	Magnet
Color	Red/Blue/Yellow
Q'TY	48PCS
Meas	63*45*45cm

JHS-03L

Drawing



Technical parameters

Voltage	DC 12V
Current	120mA
Flashes	90/minute
Install	One screw
Color	Red/Blue/Yellow
Q'TY	120PCS
Meas	45*29*37cm

JHS-05L

Drawing



Technical parameters

Voltage	DC 12V
Current	300mA
Flashes	90/minute
Install	Two screws
Color	Red/Blue/Yellow
Q'TY	48PCS
Meas	58*24*45cm

JHS-07L

Drawing



Technical parameters

Voltage	DC 12V
Current	200mA
Flashes	90/minute
Install	Two screws
Color	Red/Blue/Yellow
Q'TY	64PCS
Meas	52*52*50cm

STROBE LIGHT

JHS-08L

Drawing



Technical parameters

Voltage	DC 12V
Current	300mA
Flashes	90/minute
Install	Two screws
Color	Red/Blue/Yellow
Q'TY	16PCS
Meas	55*39*56cm

JHS-09L

Drawing

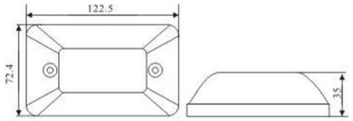

Technical parameters

Voltage	DC 12V
Current	300mA
Flashes	150/minute
Install	Two screws
Color	Red/Blue/Yellow
Q'TY	100PCS
Meas	58*24*45cm

JHS-10L

Drawing



Technical parameters

Voltage	DC 12V
Current	300mA
Flashes	150/minute
Install	Two screws
Color	Red/Blue/Yellow
Q'TY	100PCS
Meas	58*24*45cm

JHS-11L

Drawing



Technical parameters

Voltage	DC 12V
Current	1500mA
Flashes	130/minute
Install	Magnet
Color	Red/Blue/Yellow
Q'TY	20PCS
Meas	70*42*32cm

JHS-12L

Drawing



Technical parameters

Voltage	DC 12V
Current	1500mA
Flashes	130/minute
Install	Magnet
Color	Red/Blue/Yellow
Q'TY	20PCS
Meas	70*42*32cm